

Medium-Duty Hold-Down Release Mechanism

11 kN Release Preload
Electrically and Mechanically Redundant




HOLD-DOWN RELEASE MECHANISM, MEDIUM-DUTY



How To Order	
Part No.	GSS500-000001
Description	Medium Duty HDM, 11 kN

- **Pyrotechnic-free alternative (low-shock fuse-wire) for single-event release of deployable space systems**
- **Electrical actuation: 4 Amperes**
- **User-serviceable and refurbishable units**
- **Ruggedized against transient and noise (EMI/EMP/ESD/RFI) inputs**
- **Extended temperature ranges: -150°C to +150°C**
- **Easy 15-minute on-site refurbish, order refurbishment initiator P/N [GSS501-000001](#)**
- **Made by Glenair in Salem, Germany**

Mechanical release unit for ground testings available upon request

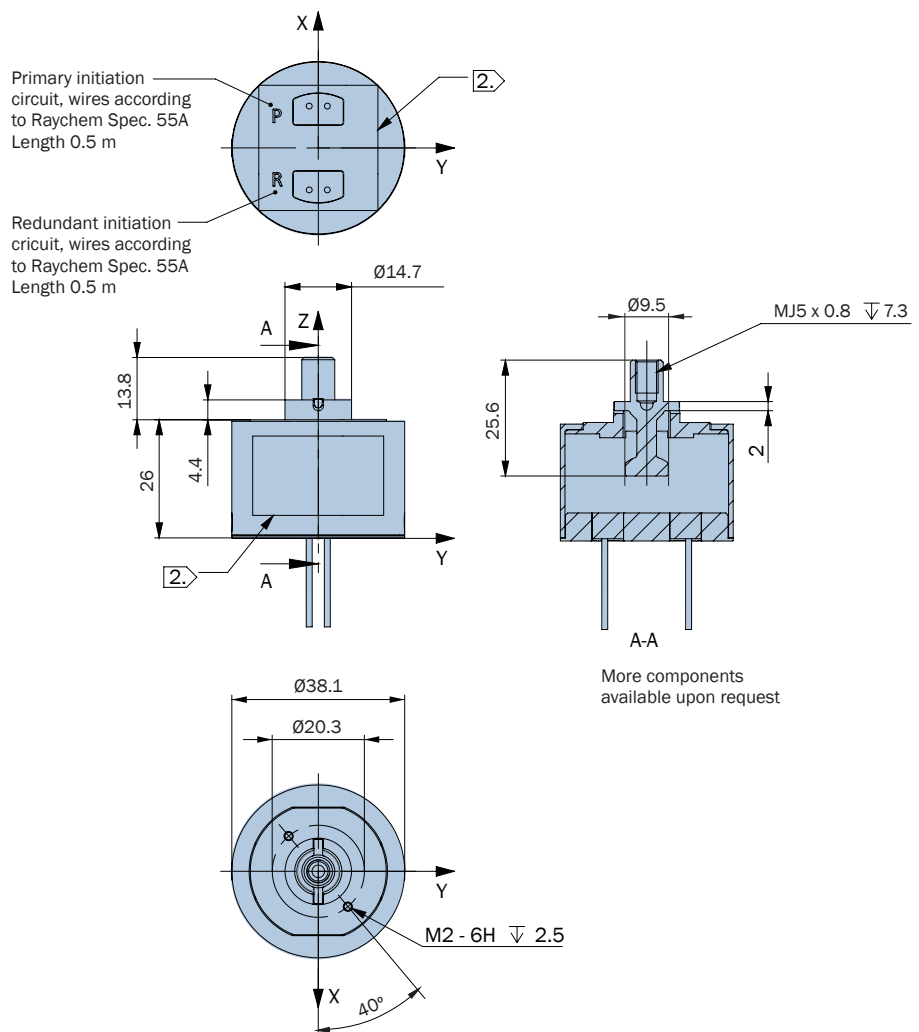

MATERIAL/FINISH

Aluminium alloy, Stainless steel, Polyamidimid GF30%

NOTES


- Unit is identified with Glenair name, CAGE code, part number, and date code, space permitting. Primary initiation circuit identified with "P" and redundant with "R". See [2](#).
- Release preload: 11 kN
- Reference Glenair P/N GSS501-000001 for refurbishment initiator



Medium-Duty Hold-Down Release Mechanism

11 kN Release Preload

Electrically and Mechanically Redundant

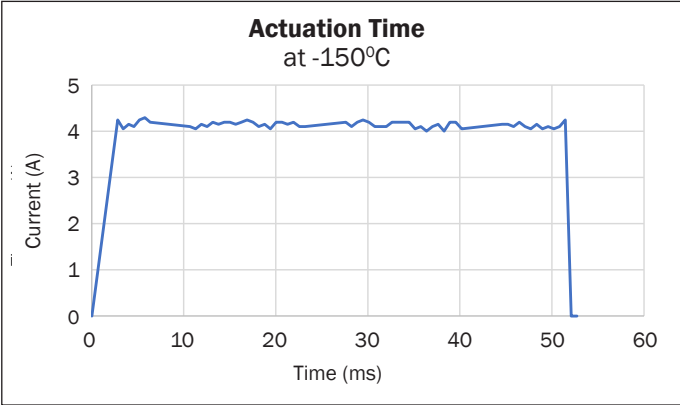

Tested Capability for GSS500-000001	
Nominal Preload	11 kN
Proof Preload	12.1 kN
Ultimate Load	15.5 kN
Weight	Max 86 g with 0.5 m Harness
Electrical Resistance	0.5 – 1.5 Ω
Sine Vibration 3 orthogonal axes	25 g's
Random Vibration 3 orthogonal axes	50.9 g _{rms}
Actuation Time	Max 60 ms @ 4.0 A at -150 °C
Shock Input	2849 g's at 5000 Hz
Source Shock	Max 300 g at nominal preload
Life Test	Mechanical components qualified for 10 times use with refurbishment initiators
Operating temperature range	-150 °C to +150 °C
Preload drop over 6 months	<3.0% loss at nominal preload
Allowable Angular misalignment	2°
Epoxy	Outgassing requirements per ECSS

