

Medium-Duty Hold-Down Release Mechanism

1.5 kN Release Preload
Electrically and Mechanically Redundant




HOLD-DOWN RELEASE MECHANISM, MEDIUM-DUTY



How To Order	
Part No.	GSS500-000005
Description	Medium Duty HDRM, 1.5 kN

- **Pyrotechnic-free alternative (low-shock fuse-wire) for single-event release of deployable space systems**
- **Electrical actuation: 4 Amperes**
- **User-serviceable and refurbishable units**
- **Ruggedized against transient and noise (EMI/EMP/ESD/RFI) inputs**
- **Extended temperature ranges: -150°C to +150°C**
- **Easy 15-minute on-site refurbish, order refurbishment initiator P/N [GSS501-000004](#)**
- **Made by Glenair in Salem, Germany**

Mechanical release unit for ground testings available upon request

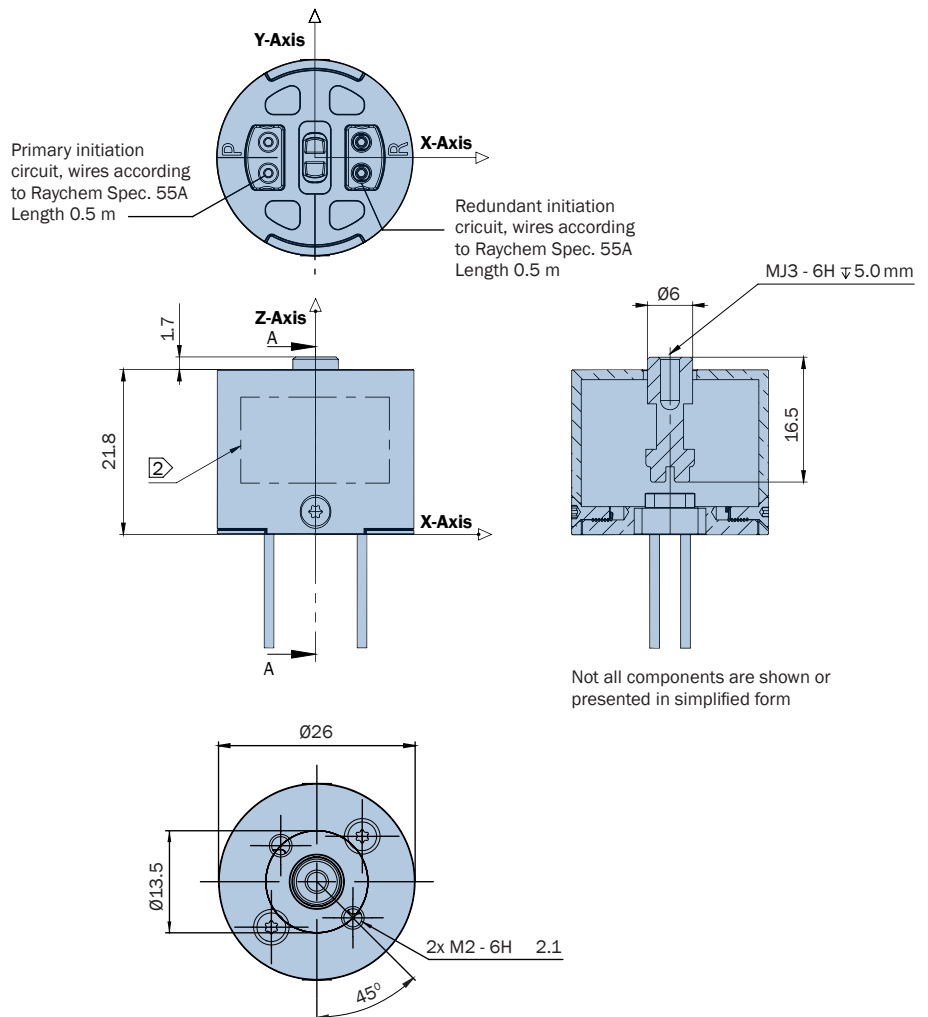

MATERIAL/FINISH

Aluminium alloy, Stainless steel, Polyamidimid GF30%

NOTES


- Unit is identified with Glenair name, CAGE code, part number, and date code, space permitting. Primary initiation circuit identified with "P" and redundant with "R". See [2](#).
- Release preload: 1.5 kN
- Reference Glenair P/N GSS501-000004 for refurbishment initiator



Medium-Duty Hold-Down Release Mechanism

1.5 kN Release Preload

Electrically and Mechanically Redundant

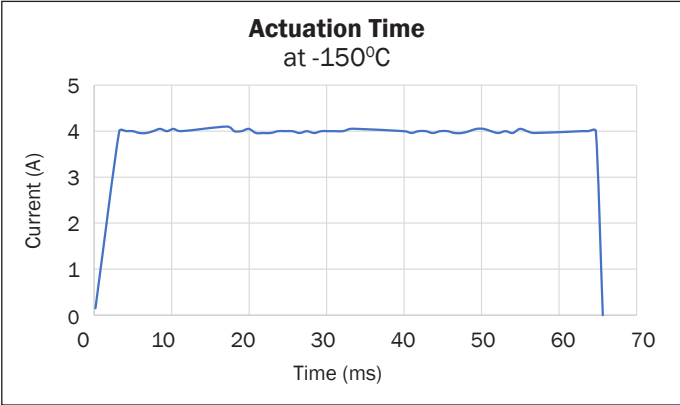

Tested Capability for GSS500-000005	
Nominal Preload	1.5 kN
Proof Preload	1.65 kN
Ultimate Load	7.4 kN
Weight	Max 46 g with 0.5 m Harness
Electrical Resistance	0.3 – 2.0 Ω
Sine Vibration 3 orthogonal axes	25 g's
Random Vibration 3 orthogonal axes	50.9 g _{rms}
Actuation Time	Max 70 ms @ 4.0 A at -150°C
Admissible Shock Input	2849 g's at 5 kHz
Source Shock	Max 60 g's at nominal preload
Life Test	Mechanical components qualified for 10 times use with refurbishment initiators
Operating temperature range	-150°C to +150°C
Preload drop over 6 months	<3.0% loss at nominal preload
Allowable Angular misalignment	2°
Epoxy	Outgassing requirements per ECSS

